



FP-100

STANDALONE FINGERPRINT READER

FP 100 is a simple one-door standalone biometric system. The reader can store up to 97 finger templates, it has one relay output and one exit button input. If secure installation is needed, the reader can be connected to remote relay unit at secured area. which also plays the role of exit push button. Complete setup and programming can be done by scrolling and tapping on the sensor.




FEATURES



FP 100KP

- Highly secure since controller (RU2) is securely located indoors
- Compact 2 mod size
- Flush mounted
- Can open 1 door and trigger 1 light scene or
- Can open 2 doors independently or simultaneously
- Easy to add and delete fingerprints
- Proven European product quality
- Tri-colour LEDs for status

CONNECTION DIAGRAM

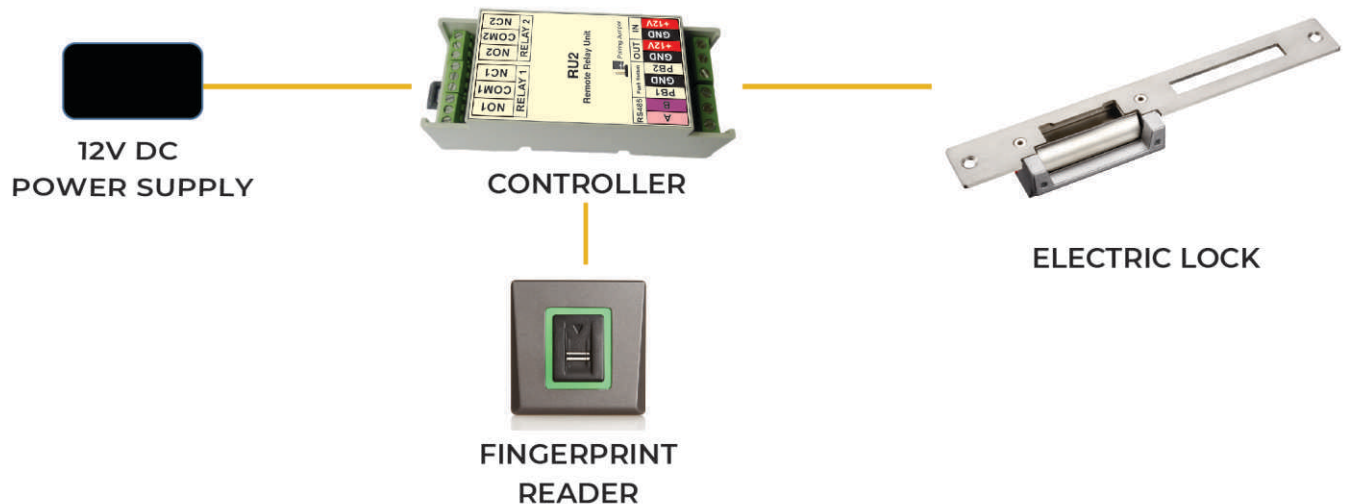

SPECIFICATIONS

Finger print Capacity :	97 templates
Output :	1xRelay (2A 24V DC)
Push Button input :	Yes
Backlight ON/OFF :	Yes
Power supply :	12VDC
Indication :	Tricolour LED status
Mounting :	Flush
Dimensions :	80 x 80 x 9 (mm)